

5XA Series 5.0 x 3.2 mm SMD Crystal

5 : 5.0×3.2×0.8 mm | SMD5032-2P X : Crystal Resonator A : Ceramic Seam 2PAD Package

Feature

- AT-cut Crystal Construction
- Miniature Ceramic surface mount with Metal Lid
- High temperature, high precision and reliability Characteristics
- Package Size: 5.0 x 3.2 x 0.8mm (2PAD)
- Pb-free and RoHS/Green compliant

Applications

- Industrial applications
- Portable devices
- Short-range Wireless module
- Computers, Modems, Microprocessors



Electrical Specifications

Item	Symb.	Min.	Typ.	Max.	Unit	Notes
Frequency Range	Freq.	8.000		50.000	MHz	
Oscillation Mode		Fundamental (AT-cut)				
Frequency Tolerance	$\Delta f/f$			± 10	ppm	at 25°C $\pm 2^\circ\text{C}$
Operating Temperature	T _{use}	-20		70	°C	
		-40		85	°C	
Storage Temperature Range	T _{sta}	-55		125	°C	
Shunt Capacitance	C ₀			5	pF	
Drive Level	DL		10	300	μW	
Load Capacitance	CL	8		20	pF	
Insulation Resistance	IR			500	MΩ	at DC 100V
Aging	f _{age}			3	ppm	1st. Year at 25°C

Frequency Stability & Operating Temperature Range

Temp. \ FT	$\pm 10\text{ppm}$	$\pm 15\text{ppm}$	$\pm 20\text{ppm}$	$\pm 30\text{ppm}$
-20°C to +70°C	$\triangle$	★	★	★
-40°C to +85°C		$\triangle$	★	★

★: Available $\triangle$: Conditional


Equivalent Series Resistance

Frequency Range	ESR(Max.)
8MHz $\leq$ Freq. < 10MHz	100 Ω
10MHz $\leq$ Freq. < 16MHz	80 Ω
16MHz $\leq$ Freq. < 20MHz	50 Ω
20MHz $\leq$ Freq. < 24MHz	40 Ω
24MHz $\leq$ Freq. $\leq$ 50MHz	30 Ω


5XA Series 5.0 x 3.2 mm SMD Crystal

5 : 5.0×3.2×0.8 mm | SMD5032-2P X : Crystal Resonator A : Ceramic Seam 2PAD Package

Dimensions (UNIT:mm)

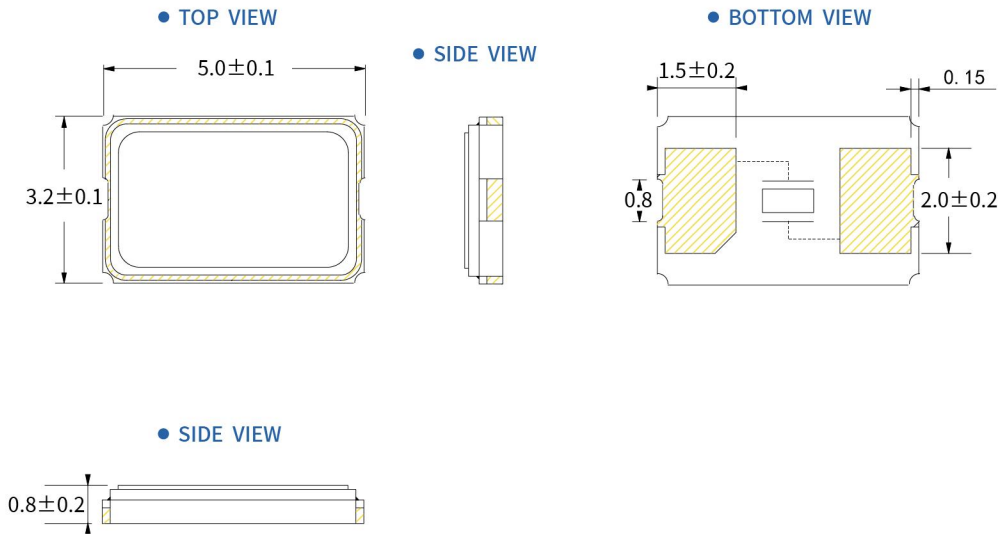

Solder pad layout (UNIT:mm)

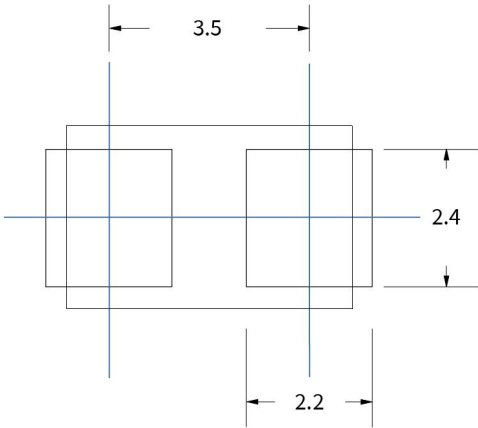

Options and Part Identification : Example SX5A8.000F1010F30

Company	Ceramic Package	Frequency Code [MHz]	Vibration Mode	Load Capacitance	Frequency Tolerance	Operating Temperature	Frequency Drift	
SX	5A	X.XXX	F	10	10	F	30	
↓		↓	↓	↓	↓	↓	↓	
Code	Company	Frequency	Code	Vibration Mode	Code	Frequency Tolerance	Code	Frequency Drift
SX	SCTF	8.000	F	AT - Fundamental	10	±10ppm	10	±10ppm
					20	±20ppm	15	±15ppm
							20	±20ppm
							30	±30ppm
	Code	Ceramic Package		Code	Load Capacitance		Code	Operating Temperature
	0B	1.6 x 1.2 x 0.35mm [4PAD]		S	Please specify CL in pF or S for series		E	-20°C ~ +70°C
	1B	2.0 x 1.6 x 0.45mm [4PAD]		06	6pF		F	-40°C ~ +85°C
	2B	2.5 x 2.0 x 0.55mm [4PAD]		08	8pF			
	3B	3.2 x 2.5 x 0.7mm [4PAD]		10	10pF			
	5B	5.0 x 3.2 x 0.8mm[4PAD]		12	12pF			
	5A	5.0 x 3.2 x 0.8mm[2PAD]		20	20pF			
	7B	7.0 x 5.0 x 1.0mm[4PAD]						

If you have other parameter requirements, you can contact **SCTF** at any time.


5XA Series 5.0 x 3.2 mm SMD Crystal

5 : 5.0×3.2×0.8 mm | SMD5032-2P

X : Crystal Resonator


A : Ceramic Seam 2PAD Package

Frequency Temperature Characteristics

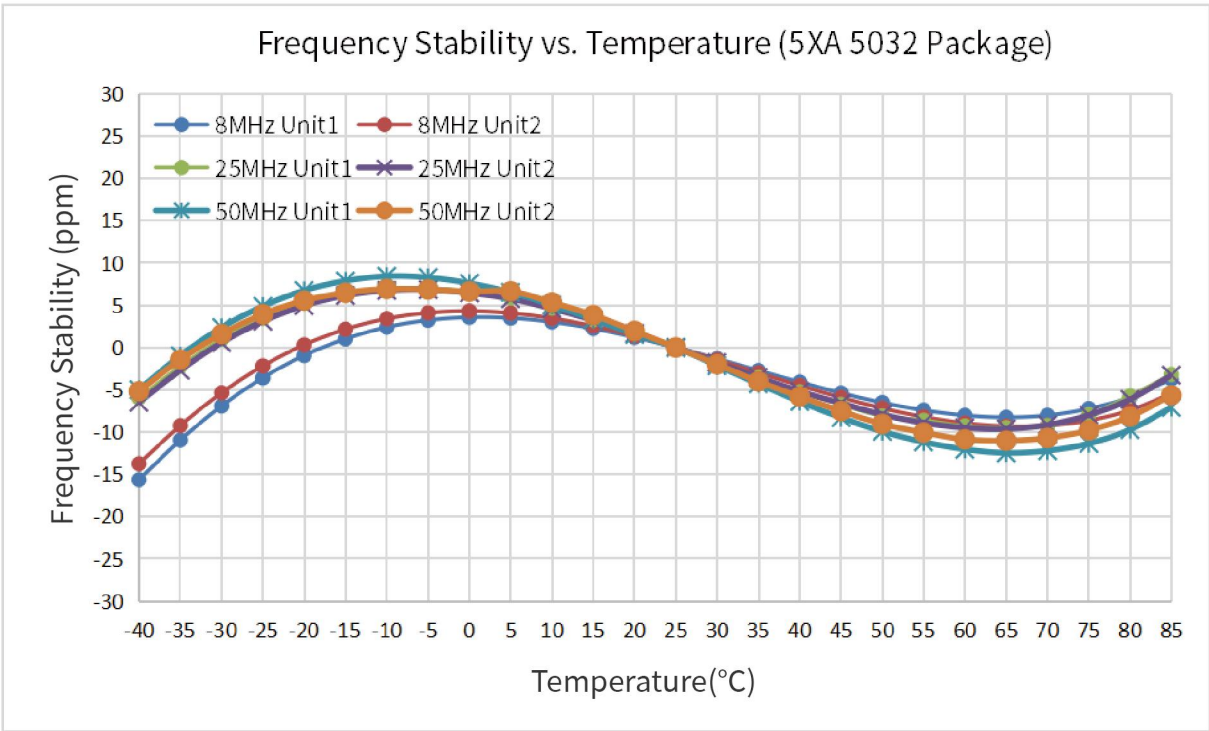


Product Structure&Marking Information

Product Structure

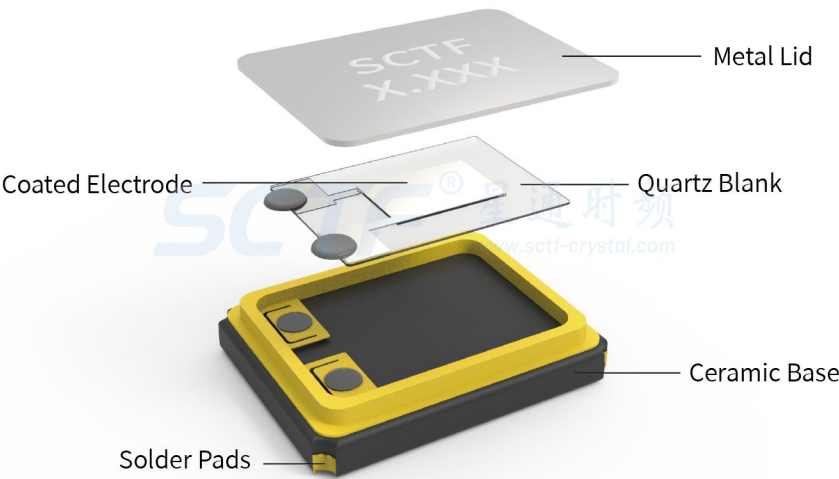


Marking Information

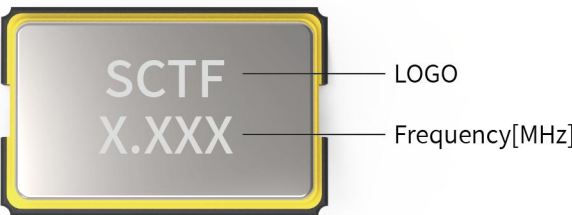

5XA Series 5.0 x 3.2 mm SMD Crystal

5 : 5.0×3.2×0.8 mm | SMD5032-2P X : Crystal Resonator A : Ceramic Seam 2PAD Package

Suggested Reflow Profile

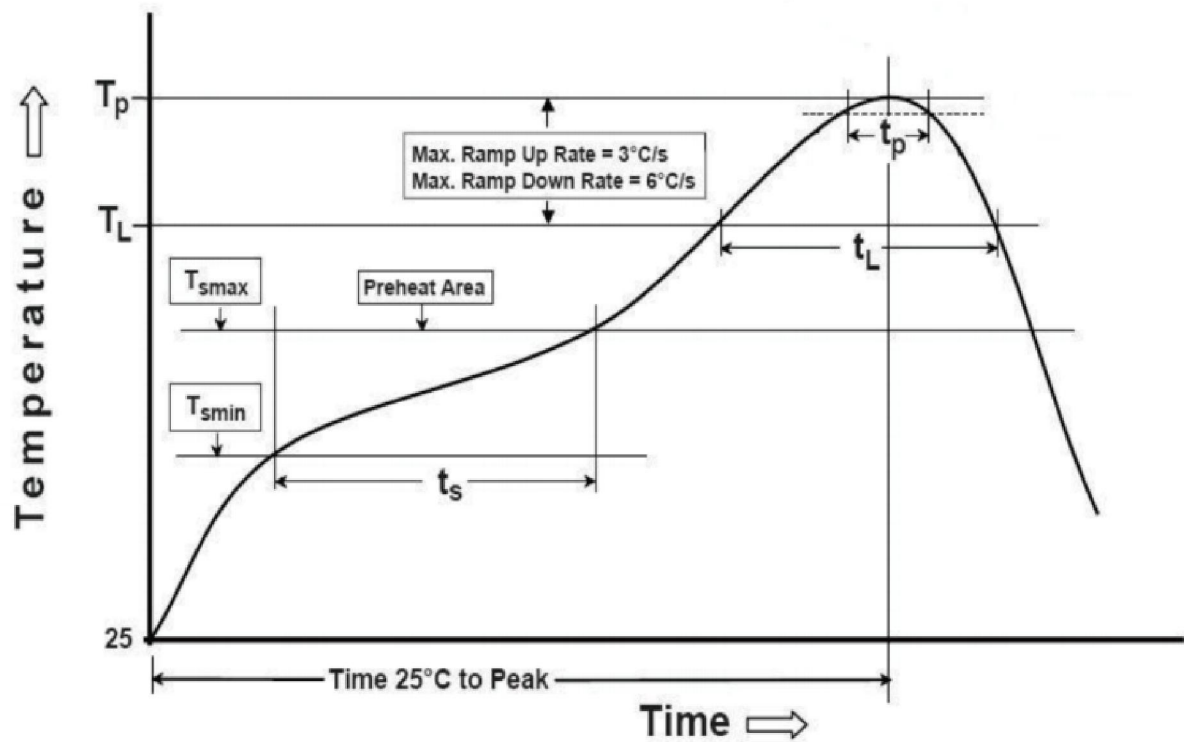




Profile Feature	Sn - Pb Eutectic Assembly	Preheat / Soak
Preheat / Soak ● Temperature Min (T_s min) ● Temperature Max (T_s max) ● Time (T_s min to T_s max)	100°C 150°C 60-120 seconds	150°C 200°C 60-120 seconds
Ramp - up rate (T_L to T_p)	3°C/ second max.	3°C/ second max.
Time maintained above ● Liquidous temperature (T_L) ● Time (t_L) maintained above T_L	183°C 60-150 seconds	217°C 60-150 seconds
Peak package body temperature (T_p)	235°C	260°C
Time within 5° C of the specified classification temperature (T_p)	20 seconds	30 seconds
Ramp - down rate (T_p to T_L)	6°C/ second max.	6°C/ second max.
Time 25° C to peak temperature	6 minutes max.	8 minutes max.
Suggest reflow times	2 Times max.	

5XA Series 5.0 x 3.2 mm SMD Crystal

5 : 5.0×3.2×0.8 mm | SMD5032-2P X : Crystal Resonator A : Ceramic Seam 2PAD Package

Packaging Information

T=Tape and reel (1,000pcs/reel)

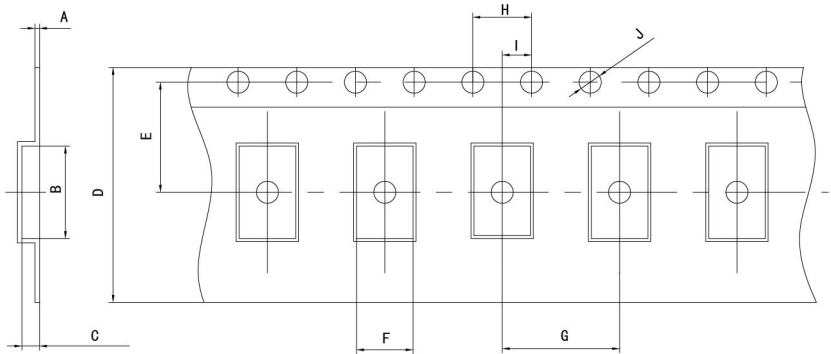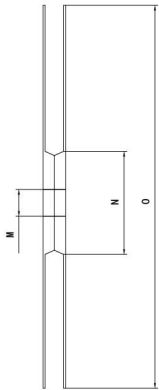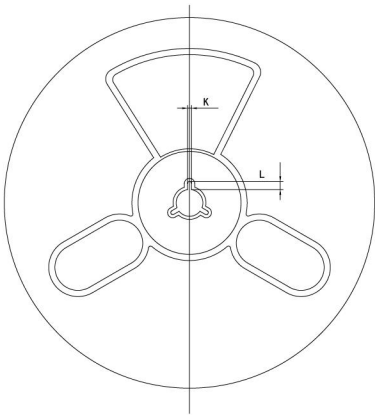

Pocket Tape Dimensions(mm)

Series	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
5XA	0.3±0.05	5.4±0.1	1.2±0.1	12±0.3	5.5±0.1	3.6±0.1	8.0±0.1	4.0±0.1	2.0±0.1	φ1.5±0.1	2.0±0.2	4.0±1.0	φ13±0.5	φ60±1	φ180±1

Common Frequencies – MHz

5XA Series				
8.000	8.192	10.000	11.0592	11.2896
12.000	12.288	13.000	13.560	14.31818
14.7456	16.000	16.384	18.432	19.6608
20.000	22.1184	24.000	24.576	25.000
26.000	27.000	27.120	28.63636	30.000
32.000	40.000	48.000	50.000	