

OB Series FULL SIZE Crystal Oscillator

OB : 20.4×12.8×4.9 mm | PXO-14

Feature

- CMOS compatible logic levels
- Tri-state function available
- Supply voltage range : 1.62V ~ 5.5V(Compatible with 1.8V, 2.5V, 3.3V , 5.0V)
- RoHS Compliant / Pb Free

Applications

- Wireless Devices
- Internet of Things (IoT) devices
- Ethernet/Gigabit Ethernet
- Audio, Video, Gaming products
- Micro base station



Electrical Specifications

Item	Symb.	Min.	Typ.	Max.	Unit	Notes
Frequency Range	Freq.	1.000		100.000	MHz	
Operating Temperature	T _{use}	-20		+70	°C	
		-40		+85	°C	
Storage Temperature Range	T _{stg}	-55		+125	°C	
Supply Voltage	V _{dd}	1.62	1.8/2.5/3.3/5.0	5.5	V	
Output Load	L _{CMOS}		15		pF	
Current Consumption	I _{cc}			25	mA	1MHz ≤ Freq. < 40MHz
				60		40MHz ≤ Freq. < 80MHz
				80		80MHz ≤ Freq. < 160MHz
Duty Cycle	SYM	40		60	%	50 % V _{dd} level, L _{CMOS} ≤ 15 pF
Rise / Fall Time	T _R / T _F			5	nS	10% V _{dd} to 90% Level
Start-up Time	T _{str}			10	mS	To 90% of Final Amplitude
High output voltage	V _{OH}	0.9V _{dd}			V	
Low output voltage	V _{OL}			0.1V _{dd}	V	
Enable Voltage High (Logic 1)	V _{IH}	0.7V _{dd}			V	Output will be disable if OE is Logic 0 Output will be enable if OE is Logic 1 or open
Enable Voltage Low (Logic 0)	V _{IL}			0.3V _{dd}	V	
Aging	f _{age}			3	ppm	1st. Year at 25°C

Frequency Stability & Operating Temperature Range

Temp.	FT	±30ppm	±50ppm
		★	★
-20°C to +70°C		★	★
-40°C to +85°C		△	★

★: Available △: Conditional


All condition: Include 25°C tolerance, operating temperature range , input voltage change, aging, load change.

OB Series FULL SIZE Crystal Oscillator


OB : 20.4×12.8×4.9 mm | PXO-14

Dimensions (UNIT:mm)


• TOP VIEW



• SIDE VIEW




• SIDE VIEW



PIN	FUNCTION
1	NC/Tri-State
4	GND
5	Output
8	Vdd

Solder pad layout (UNIT:mm)

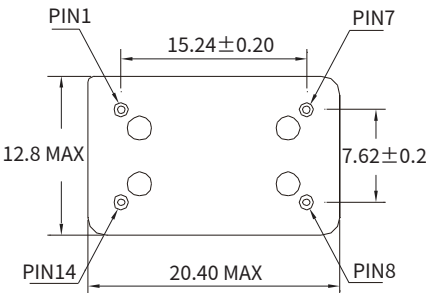


Notes:
NC: If the product does not contain Tri-state function, no matter how PIN1 connected, the product is working properly.
Tri-state: PIN 1 connected to Vdd or floating, the product is working properly; connected to GND, stops working.

Options and Part Identification : Example SXOB1.000B20F30TNN

Company	Ceramic Package	Frequency Code [MHz]	Supply Voltage	Frequency Tolerance	Operating Temperature	Frequency Drift	Output	Current Consumption	Phase Noise
SX	OB	X.XXX	B	20	F	30	T	N	N
↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Code Company		Frequency		Code Frequency Tolerance		Code Frequency Drift		Code Current	
SX SCTF		1.000 13.560 19.200 37.125		10 ±10ppm 20 ±20ppm		15 ±15ppm 20 ±20ppm 30 ±30ppm		N Standard	
	↓		↓		↓		↓		↓
	Code Ceramic Package		Code Voltage		Code Operating Temperature		Code Output		Code Phase Noise
	1M 2.0×1.6×0.75mm		D 1.8V		E -20°C ~ +70°C		T CMOS 15pF		N Standard
	2M 2.5×2.0×0.81mm		H 2.5V		F -40°C ~ +85°C		H CMOS 30pF		
	3M 3.2×2.5×0.95mm		B 3.3V				G CMOS 50pF		
	5M 5.0×3.2×1.2mm		A 5.0V						
	7M 7.0×5.0×1.3mm								
	OA 12.7×12.7×5.4 mm [PXO-8]								
	OB 20.4×12.8×4.9 mm [PXO-14]								


If you have other parameter requirements, you can contact **SCTF** at any time.

Frequency Temperature Characteristics

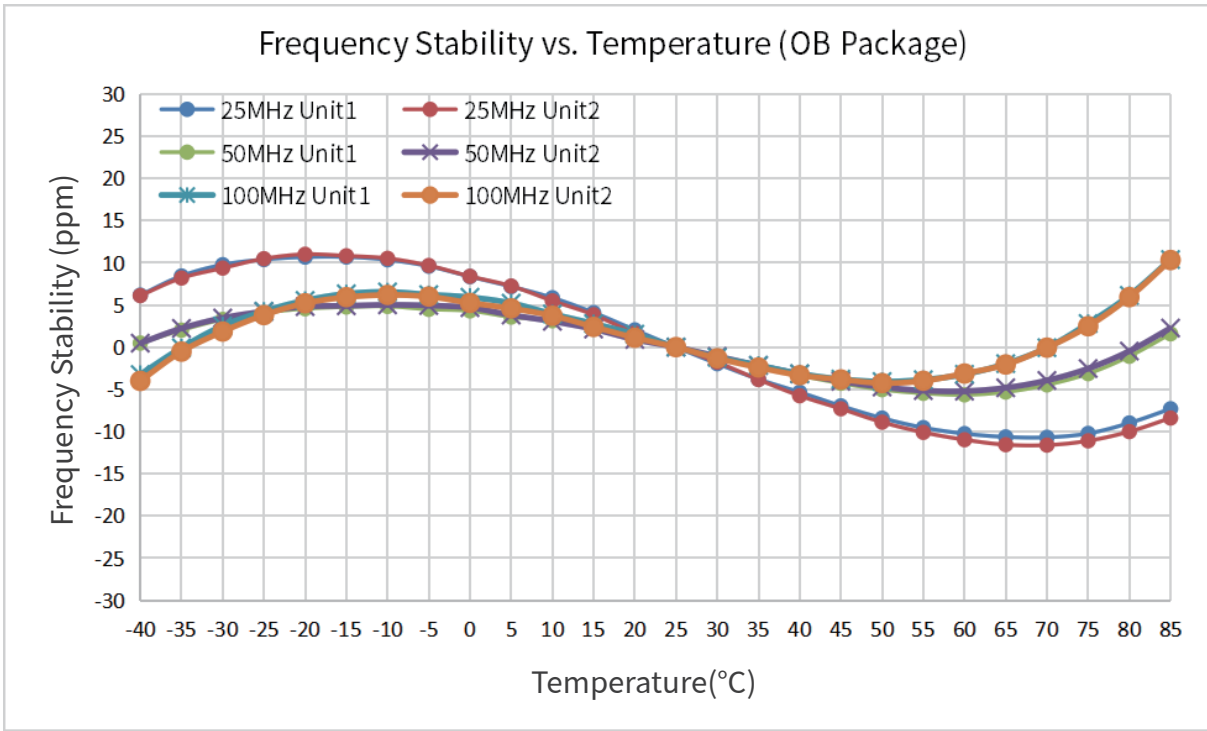

Product Structure&Marking Information


Product Structure

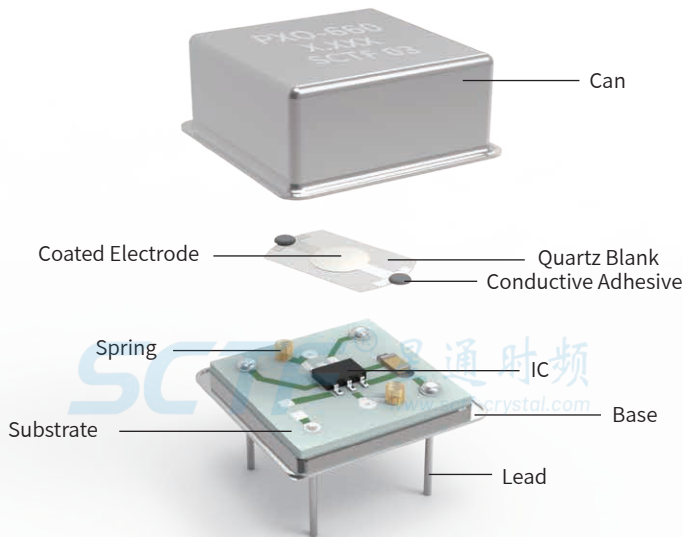

Marking Information



Suggested Reflow Profile

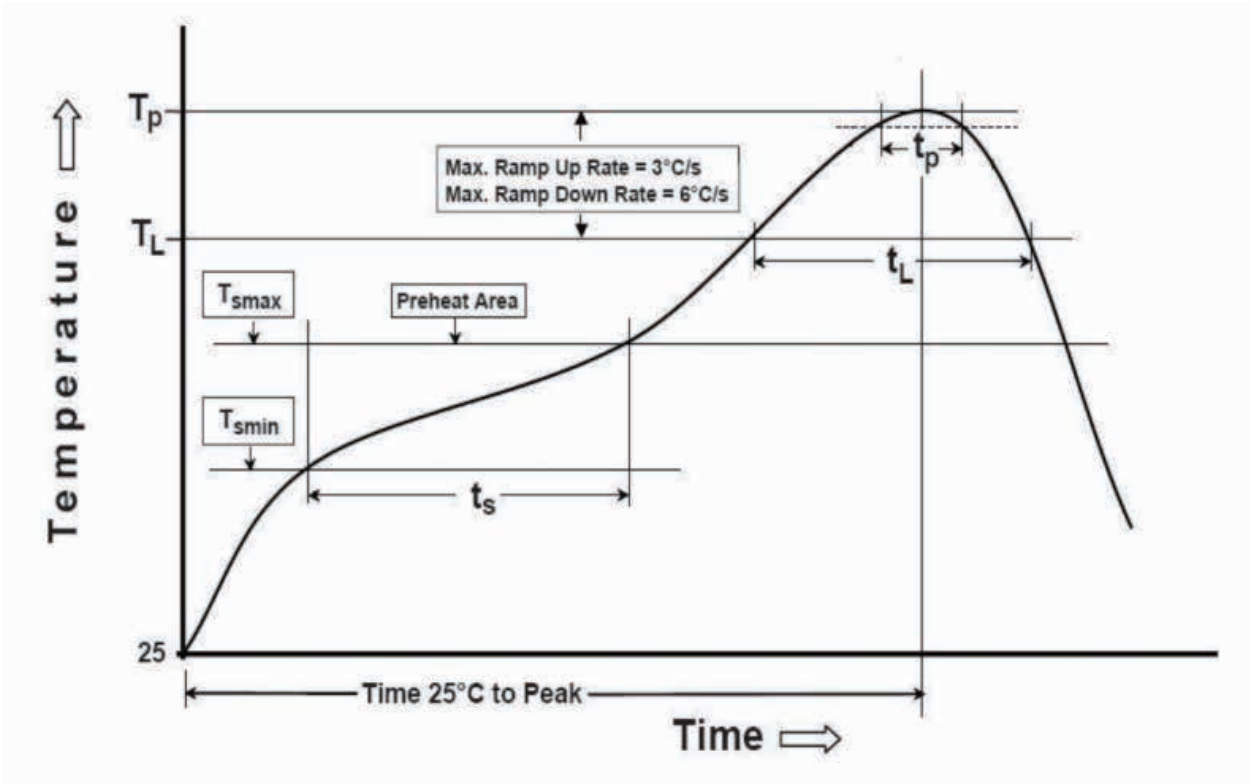


Profile Feature	Sn - Pb Eutectic Assembly	Preheat / Soak
Preheat / Soak ● Temperature Min (Ts min) ● Temperature Max (Ts max) ● Time (Ts min to Ts max)	100°C 150°C 60-120 seconds	150°C 200°C 60-120 seconds
Ramp - up rate (TL to Tp)	3°C/ second max.	3°C/ second max.
Time maintained above ● Liquidous temperature (TL) ● Time (tL) maintained above TL	183°C 60-150 seconds	217°C 60-150 seconds
Peak package body temperature (Tp)	235°C	260°C
Time within 5° C of the specified classification temperature (Tp)	20 seconds	30 seconds
Ramp - down rate (Tp to TL)	6°C/ second max.	6°C/ second max.
Time 25° C to peak temperature	6 minutes max.	8 minutes max.
Suggust reflow times	2 Times max.	

OB Series FULL SIZE Crystal Oscillator


OB : 20.4×12.8×4.9 mm | PXO-14

Testing Circuit

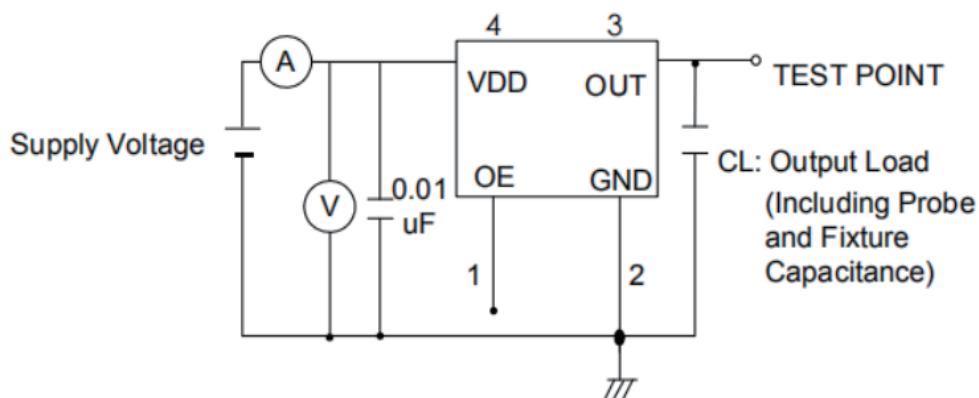

※ Notes: PIN 1 connected to Vdd or floating, the product is working properly; connected to GND, stops working.

Waveform Conditions

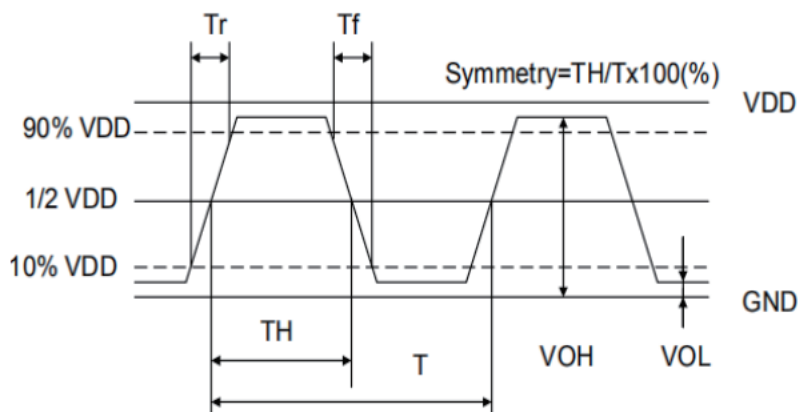

Waveform measurement system should have a min. bandwidth of 5 times the frequency being tested.

OB Series FULL SIZE Crystal Oscillator

OB : 20.4×12.8×4.9 mm | PXO-14

Packaging Information

T=Sheet and box (100pcs/sheet)



T=Sheet and box (500pcs/box)



Common Frequencies – MHz

OB Series				
3.6864	4.000	4.9152	7.3728	8.000
8.192	10.000	11.0592	12.000	12.288
13.560	14.31818	16.000	18.432	20.000
22.1184	24.576	25.000	27.000	32.000
32.768	40.000	48.000	50.000	